

Clearlook - Polycarbonate Roller Shutter

Excellent Visibility and Strength



The Clearlook roller shutter provides the ideal combination of security and visibility. The material and design offer superior resistance to attack, while the clear links provide almost unobstructed visibility.

- Over 80% visibility through the opening - More than any other comparable solution
- Material strength greater than that of steel - Design structure gives superior resistance to attack



Clearlook roller shutters offer the best of both worlds: excellent visibility combined with a very high level of security.


They are built from patented, high quality composite polycarbonate links reinforced by aluminium tubes. The shutter derives its strength and flexibility from this construction.

With over 80% transparency, the curtain gives excellent visibility and the transparent links are UV stabilised, so they do not discolour. The curtain is easy to clean and maintain and is chlorine and sea salt-resistant.

- **Perfect for retail outlets, commercial offices, schools, banks, jewellers, showrooms, shopfronts, post offices, industrial premises, etc.**

Visit www.hvpshutters.co.uk for more information and CAD-friendly drawings

Telephone 01392 270218 | Fax 01392 278548 | Email info@hvpshutters.co.uk





Technical Specification

Clearlook Polycarbonate Roller Shutter

Visit www.hvpshutters.co.uk for downloadable CAD drawings and full specification text

Construction:

Manufactured from 360mm x 85mm x 9.5mm polycarbonate links. Polycarbonate links connected by 16mm diameter horizontal aluminium. Aluminium guides 67mm or steel guides 90mm with brush strips. Aluminium bottom rail complete with bottom seal.

Operation:

Electric operation by internal tubular motor with manual override facility. Safety brake fitted when required to comply with BS EN 13241:2003-1 (HVP Security Shutters' general policy is to fit a safety brake unless specified otherwise).

Locking Options:

Electrically operated shutters are generally self locking. For additional security HVP Security Shutters recommends guide pin locks or a ground padlocking unit combined with a motor isolator box.

Maximum Sizes:

electric: 6000mmW x 5500mmH *


*An industrial motor may be required depending on shutter weight - see industrial shutter brochure for details.

Size Guide:


Shutter Height A	Typical Dim B	Typical Dim C *
Up to 2400mmH	305mm	25mm
Up to 3600mmH	355mm	30mm
Up to 4500mmH	405mm	30mm

We have done our best to ensure the information on this brochure was accurate at the time of printing. We do, however, reserve the right to change specification without prior notice.


Electric Operation

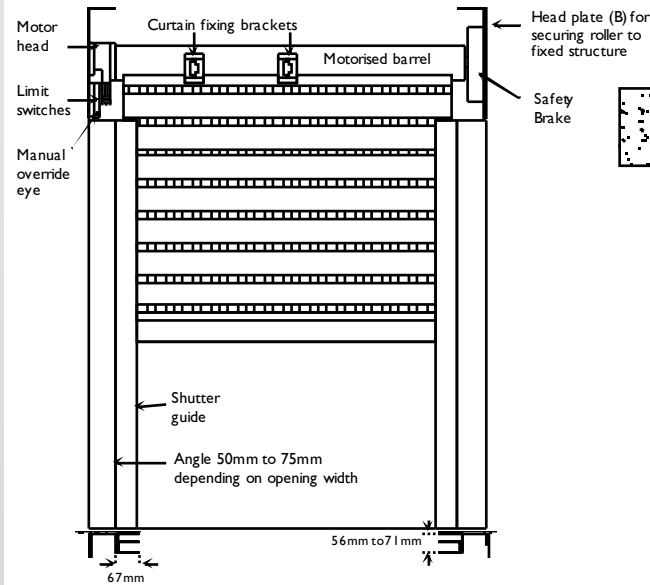



Typical face fix arrangement

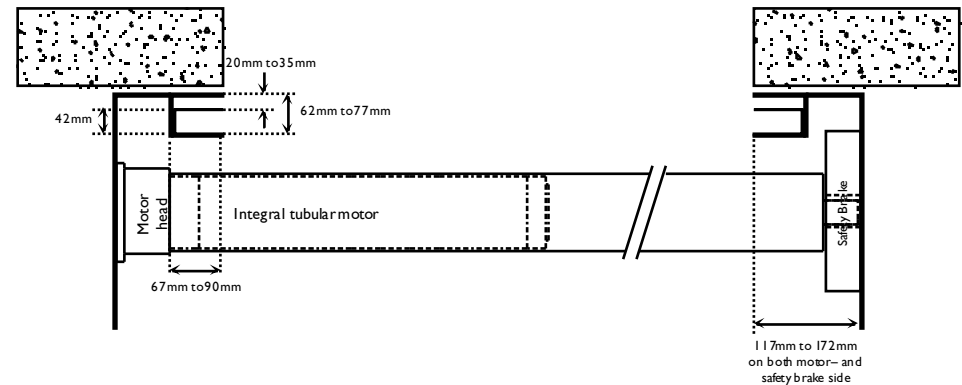

Typical reveal fix arrangement

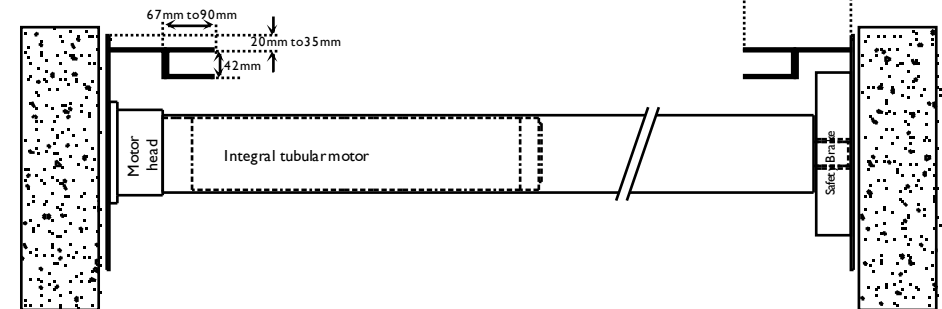

Standard bottom rail detail

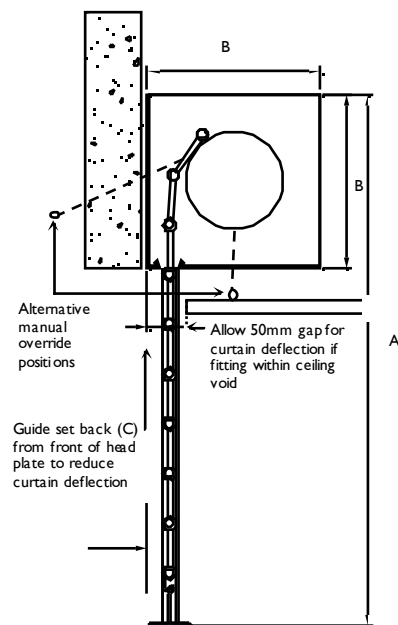

For shutter weights please visit www.hvpshutters.co.uk or contact HVP Security Shutters on 01392 270218

HVP Security Shutters Ltd

4 GRACE ROAD WEST, MARSH BARTON, EXETER, EX2 8QA

Tel: 01392 270218 | Fax: 01392 278548 | Email: info@hvpshutters.co.uk

www.hvpshutters.co.uk

Company Reg. No. 1406952

