



K25 & K-Lite Aluminium Roller Shutters

Highly Versatile Aluminium Security Shutters



The K25 and K-Lite are very popular shutters that can be used in many different applications, both internally and externally. Manufactured from aluminium, they are both lightweight and strong.

The shutters are elegant, quiet to operate and roll up into a small box. This makes them particularly suitable where headroom is limited.

The cost effective K-Lite is a roll-formed shutter with a foam filling for strength. It is suitable for low risk applications. For medium to high risk applications the stronger K25 is the right choice. The K25's curtain is manufactured from a heavy double wall aluminium profile.


Highly versatile aluminium security shutters suitable for a wide variety of commercial and domestic applications including offices, shops, receptions, schools, and hospitals.

Versatile shutters, suitable for a wide range of applications, including:
Offices, Receptions, Shopping Malls, Hotels, Restaurants, Day Centres, Hospitals, Computer Rooms, Shops, ...

- **Small and elegant**
- **Quiet in operation**
- **Lightweight and strong**
- **Low maintenance**

Visit www.hvpshutters.co.uk for more information and CAD-friendly drawings

Telephone 01392 270218 | Fax 01392 278548 | Email info@hvpshutters.co.uk





Technical Specification

K25 and K-Lite Aluminium Roller Shutter

Visit www.hvps shutters.co.uk for downloadable CAD drawings and full specification text

Construction:

Manufactured from 44mm extruded aluminium lath profile (K25) or foam filled aluminium lath profile (K-Lite); Extruded aluminium 60mm bottom rail; Aluminium guides 53mm x 22mm.

Lath with ventilation / light slots available on foam filled shutters.

Operation:

Manual push up/pull down operation; or electric operation by integral tubular motor with manual override facility. Safety brake fitted when required to comply with BS EN 13241:2003-1 (HVP Security Shutters' general policy is to fit a safety brake unless specified otherwise).

Locking Options:

Bottom rail central key lock or guide pin locks. Electrically operated shutters are generally self locking.

Finish:

Polyester Powder Coated White or Dark Brown as standard; limited range of other colours available for K-Lite.

A full range of RAL colours is available for the K25.

Maximum Sizes:


K-Lite: 3000mmW x 3000mmH (max. 6m²)

K25: 4000mmW x 3000mmH (max. 9m² electric operation or 6m² manual operation)

Size Guide:

Shutter Height A	Typical Dim B
Up to 1600mmH	180mm
Up to 2200mmH	205mm
Up to 3000mmH	250mm



We have done our best to ensure the information on this brochure was accurate at the time of printing. We do, however, reserve the right to change specification without prior notice.

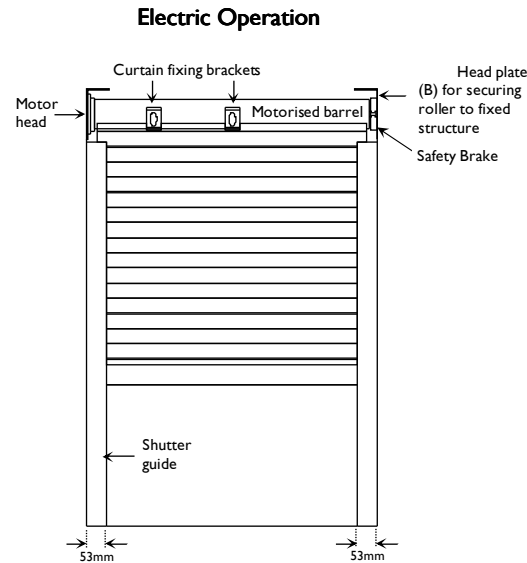

Typical face fix arrangement

Electric Operation




Typical reveal fix arrangement

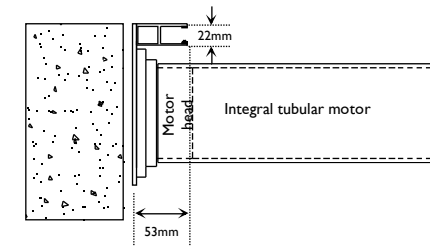

Manual Operation

Typical face fix arrangement

Typical reveal fix arrangement

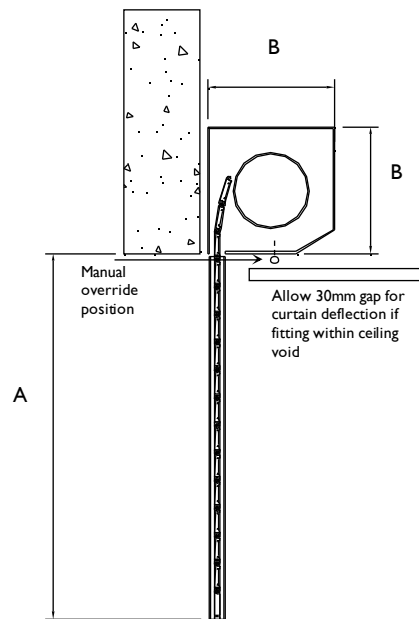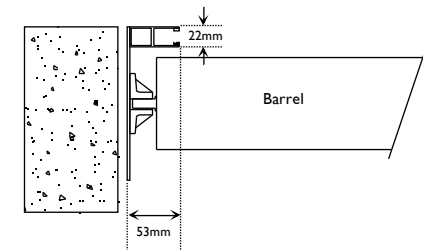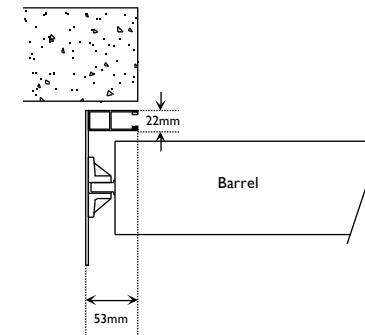

For shutter weights please visit www.hvps shutters.co.uk or contact HVP Security Shutters on 01392 270218

HVP Security Shutters Ltd

4 GRACE ROAD WEST, MARSH BARTON, EXETER, EX2 8QA

Tel: 01392 270218 | Fax: 01392 278548 | Email: info@hvps shutters.co.uk

www.hvps shutters.co.uk

Company Reg No. 1406952

