

Chainlink Roller Grilles (CL200 / CL250)

Chainlink roller grilles combine modern and elegant lines with lots of open space. They are versatile security shutters, suitable for a range of different applications.

Manufactured from aluminium tubes and links, held together with aluminium rods, Chainlink grilles make a lightweight, but strong, curtain. They are available in brick bond (CL200) and inline (CL250) patterns. A large area of open space between the links creates a sense of openness that makes Chainlink grilles a popular choice for shopfronts as well as reception counters, bars and serveries.


Options available: Steel tubes and links, steel rods, stainless steel tubes and links, powder coat finish.

Key features


- Good visibility
- Effective security
- Contemporary design

Suitable for



- Retail shopfronts
- Reception areas
- Food serveries
- Counters and bars

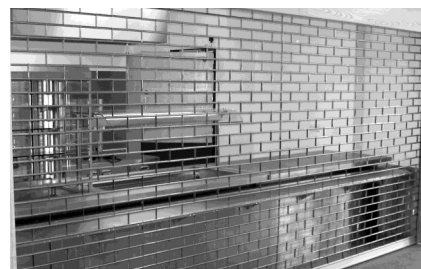


Technical specification

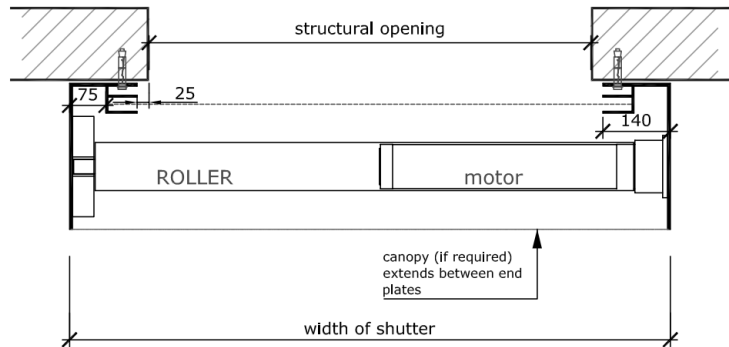


Plan view face fix (above) and reveal fix (below)

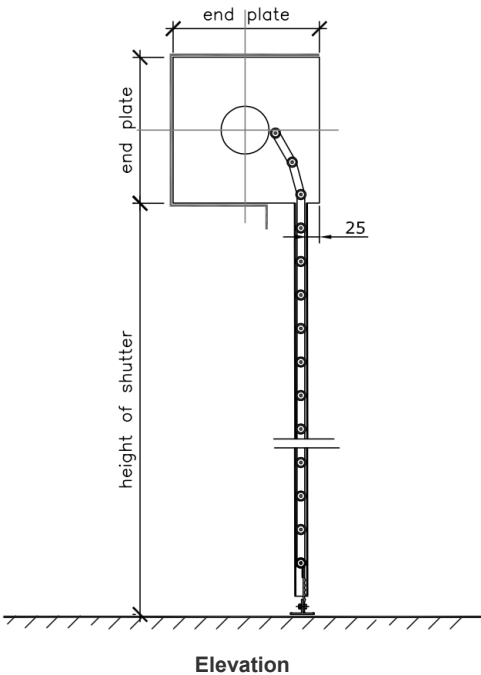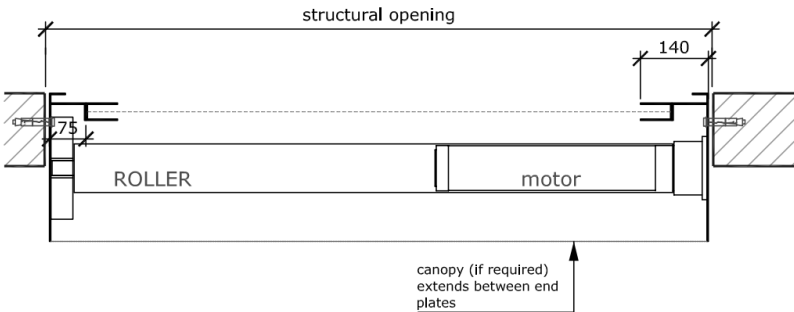

Elevation



CL200 - Brick bond
225mmW x 65mmH
79% open area



CL250 - Inline
110mmW x 65mmH
78% open area

Chainlink CL200/CL250 Roller Shutter

Tube and link security roller grille with a high degree of visibility .

Construction:

Manufactured from aluminium tubes and links on aluminium rods.
Tube size 111mm x 13mm; Link size 86mm x 16mm x 3mm;
Steel guides 65mm x 32mm or 50mm x 32mm;
Aluminium T-section Bottom rail.

Option: Steel rods for external applications or widths in excess of 6m.

Available in two patterns:

CL200 - brick bond pattern,
CL250 - inline pattern

Canopy:

Three sided folded galvanised sheet – Powder Coated finish available at additional cost.

Dimensions:

Clear opening height (to underside of canopy):

2400mm, canopy 305mm square
3000mm, canopy 355mm square
4000mm, canopy 385mm square

Operation:

Manual push-up/pull-down operation or electric operation by internal tubular motor with manual override facility.

Locking Options:

Manual shutters - Bottom rail central key lock, guide pin locks, or ground padlocking system.

Electrically operated - shutters are not supplied with locks, however for additional security HVP Security Shutters recommend guide pin locks or a ground padlocking unit, combined with a motor isolator box.

Finish:

Anodised natural aluminium as standard. Also available in polished aluminium, stainless steel or powder coated.

Maximum overall Size:

CL200:CL250 — 6000mmW (maximum 21 sq mtr) aluminium rods
CL200:CL250 — 6500mmW (maximum 20 sq mtr) steel rods