

HVP75 Industrial Security Roller Shutter

The HVP75 is a strong roller shutter with a robust design that's built to last. It's most often used as a security roller shutter in an industrial setting such as warehouses, farm-buildings and factories.

The roller shutter's curtain is made from individual lath that can be easily replaced should it get damaged. This makes the HVP75 a very economic heavy-duty roller shutter, especially in the longer term.


- Optional wicket gate for pedestrian access.
- Optional insulation for increased weather protection.

Key features

- Robust
- Economic
- Easy to maintain

Suitable for

- Industrial units
- Warehouses
- Farm buildings
- Factories
- Loading bays
- Garages

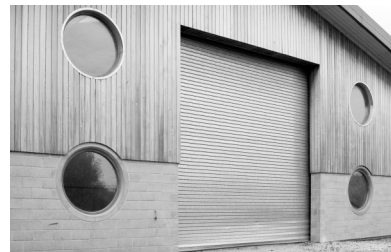

Technical specification

HVP75 Industrial roller shutter

Industrial grade security roller shutter

Construction:

Manufactured from 75mm galvanised steel curved lath with a minimum thickness of 22swg increasing to 18swg depending on size. Manufactured to BS EN 10142 and 10143 with a zinc coating of 275g/m² with hard wearing nylon or steel end locks. Galvanised guides - standard 65mm x 32mm x 3mm increasing to 95mm x 45mm x 3mm depending on size of opening. Galvanised bottom rail - cold-rolled T-section.

Operation:

Handchain operation; or electric operation by 3 phase motor with hand chain manual override and safety brake fitted as standard.

Locking Options:



Handchain shutters: chain locking cleat.
Electrically operated grilles are self-locking.

Finish:

Galvanised self-coloured, Polyester Powder Coated, or HP200 Plastisol.


Maximum Sizes:

- Hand Chain: 5000mmW x 5000mmH
- We recommend electric operation above these sizes
- Electric geared motor: 7250mmW x 7250mmH

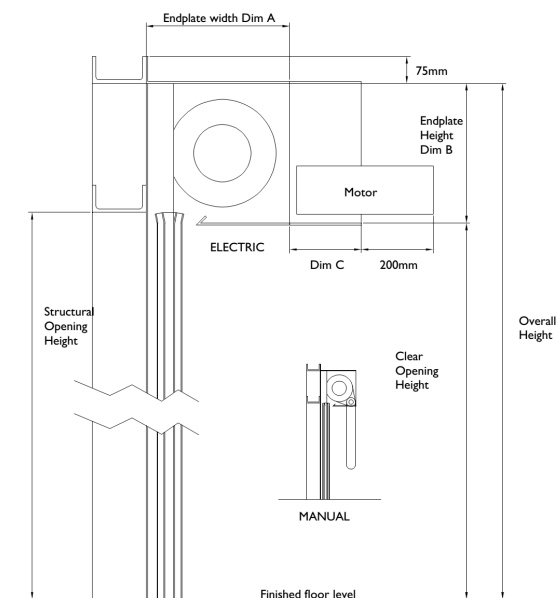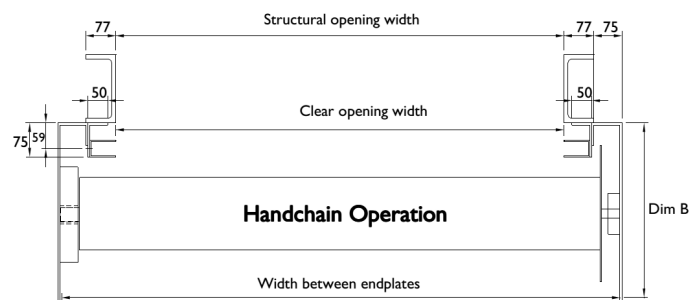

Electric Operation (direct drive)

* Recommended clearance for motor 500mm

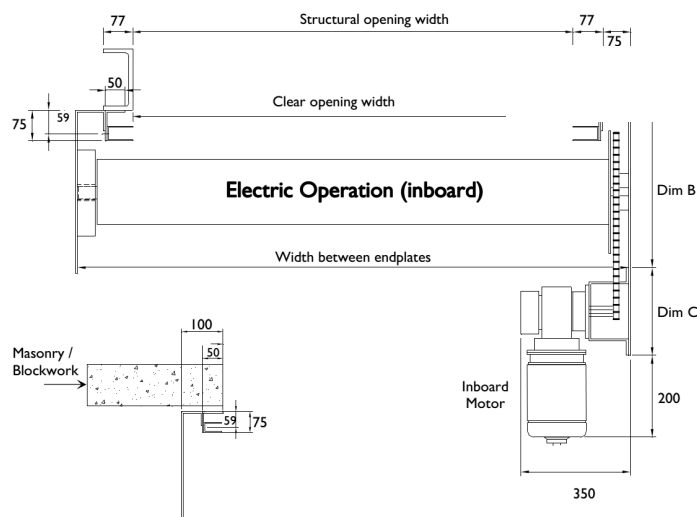

Electric Operation (inboard)

Inboard Motor