

K80 Punched Aluminium Roller Shutter

The K80 aluminium roller shutter is a robust and adaptable solution for securing both commercial and residential spaces. Designed with a compact 80 mm profile, it's ideal for installations where headroom is limited—such as garages, kiosks, and reception areas.

With its clean lines and modern appearance, the K80 delivers architectural appeal alongside reliable, space-efficient security.

Key features


- Compact 80 mm Lath Design
- Optional Punched Laths for Visibility
- Solid Aluminium Construction
- Modern Appearance

Suitable for


- Residential garages and entrances
- Retail units and shopping centres
- Receptions, hospitals, schools
- Shared car parks
- Secure kiosks and display areas



Versatile punched aluminium roller shutter

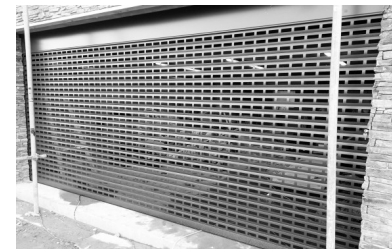

Technical specification

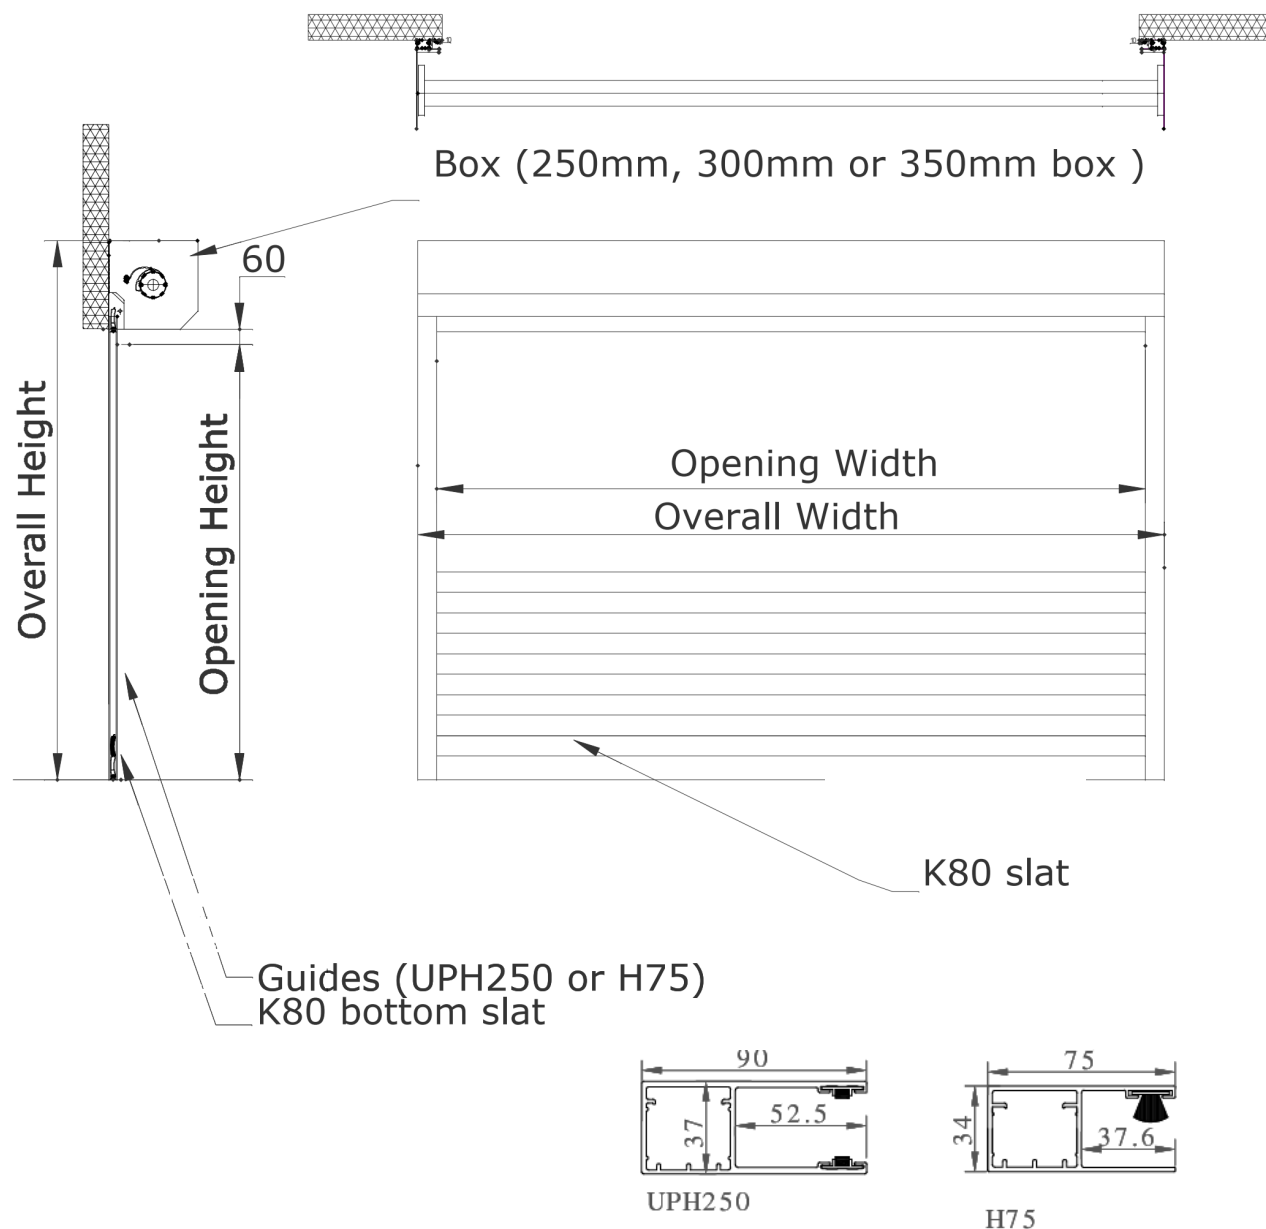

K80 Punched Aluminium Shutters

Lightweight aluminium shutters with punched slots for vision and airflow

Construction: Curtain manufactured from punched aluminium lath profile 80mm high x 19mm thick lath. For applications that require light or vision to pass through the door. Glazed slats can be incorporated into the door curtain if required.

Canopy: Roll formed aluminium in two sections; top and bottom boxes. Bottom box removable for installation and maintenance and chamfered at 45°. The shutter box is assembled on die cast aluminium endplates.

Box size:

Clear opening height (to underside of box):

2000mm, box size 250mm

2700mm, box size 300mm

3500mm, box size 350mm

Guiderails: Extruded aluminium guides with an integral box section for reinforcement and to facilitate fixing. Double brush seals supplied in all guide channels, to eliminate draughts and assist in the smooth operation of the curtain.

Operation: Manual push up/pull down operation; or electric operation by integral tubular motor with manual override facility. Safety brake fitted when required to comply with BS EN 13241:2003-1 (HVP Security Shutters' general policy is to fit a safety brake unless specified otherwise).

Locking Options: Electrically operated grilles are generally self-locking. For additional security HVP Security Shutters recommends guide pin locks or a ground padlocking unit combined with a motor isolator box.

Finish: Polyester Powder Coated White or Dark Brown finish as standard to all exposed parts; range of other colours available, including textured woodgrain finishes.

Maximum Sizes:

6000mmW x 4000mmH

Maximum area 20m square